


FERRI A U (PROFILO NORMALE)

PROFILO (Dimensioni in mm)					Momento resistenza Wx (cm ³)	Sezione cm ²		Peso Kg/m
U	h	b	a	e				
30	30	33	5,0	7,0	4,3	5,44	4,27	
40	40	35	5,0	7,0	7,1	6,21	4,87	
50	50	38	5,0	7,0	10,6	7,12	5,59	
65	65	42	5,5	7,5	17,7	9,03	7,09	
80	80	45	6,0	8,0	26,5	11,00	8,64	
100	100	50	6,0	8,5	41,1	13,50	10,60	
120	120	55	7,0	9,0	60,7	17,00	13,35	
140	140	60	7,0	10,0	86,4	20,40	16,01	
160	160	65	7,5	10,5	116,0	24,00	18,84	
180	180	70	8,0	11,0	150,0	28,00	21,98	
200	200	75	8,5	11,5	191,0	32,20	25,28	
220	220	80	9,0	12,5	245,0	37,40	29,36	
240	240	85	9,0	13,0	300,0	42,30	33,21	
260	260	90	9,5	14,0	371,0	48,30	37,92	
280	280	95	10,0	15,0	448,0	53,30	41,84	
300	300	100	10,0	16,0	535,0	58,80	46,16	
320	320	100	10,0	17,5	679,0	75,80	59,50	
350	350	100	14,0	16,0	734,0	77,30	60,60	
380	380	102	13,5	16,0	829,0	80,40	63,10	
400	400	110	14,0	18,0	1.020,0	91,50	71,80	

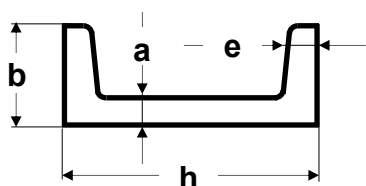

FERRI A U (PROFILO SPECIALE)

PROFILO (Dimensioni in mm)					Sezione cm ²	Peso Kg/m
U	h	b	a	e		
25	25	12	4	4,0	1,66	1,30
30	30	15	4	4,5	2,21	1,74
35	35	17	4	5,0	2,75	2,15
40	40	20	5	5,5	3,66	2,87
50	50	25	5	6,0	4,92	3,86
60	60	30	6	6,0	6,46	5,07